




di Morelli D. & C. S.a.s.

Tel. 02/3541607—Fax 039/101787

www.ciemmepompe.com—info@ciemmepompe.com

POMPE CENTRIFUGHE



ELETTROPOMPE ad ASSE ORIZZONTALE serie O2

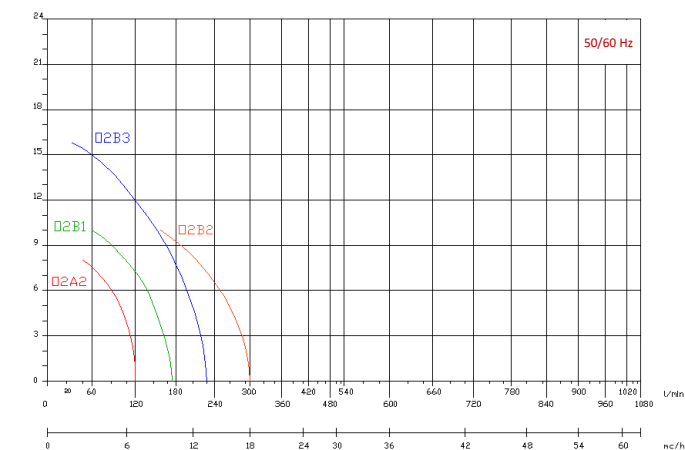

MOTORI STANDARD SERIE MEC IE3/IE3—2 POLI—TRIFASE—V230/400/50Hz—RPM 2850_V275/480/60Hz—RPM 3450

MODELLO	Kw	H prevalenza totale in mt					
		Q portata in l/min					
O2A2-80	0,37	H	0	4	6	8	
		Q	120	100	80	40	
O2B1-100	0,55	H	0	4	6	8	10
		Q	170	150	120	100	60
O2B2-100	1,1	H	0	4	6	8	10
		Q	300	280	240	190	150
O2B3-120	1,1	H	0	6	8	10	12
		Q	220	200	160	135	100

LE PORTATE SONO RIFERITE AL FUNZIONAMENTO CON ACQUA

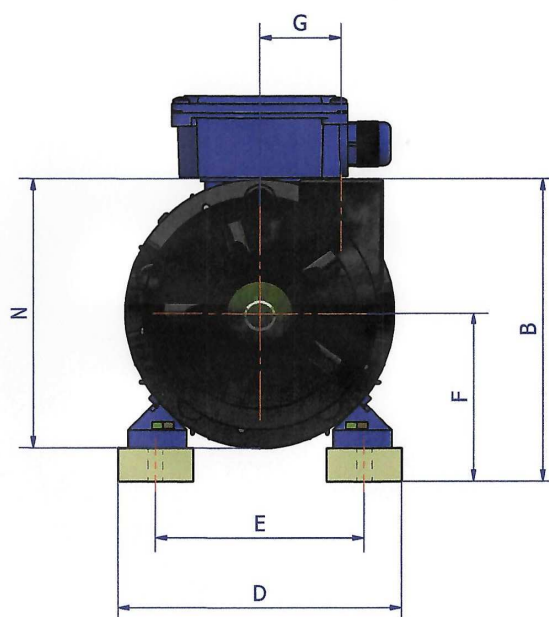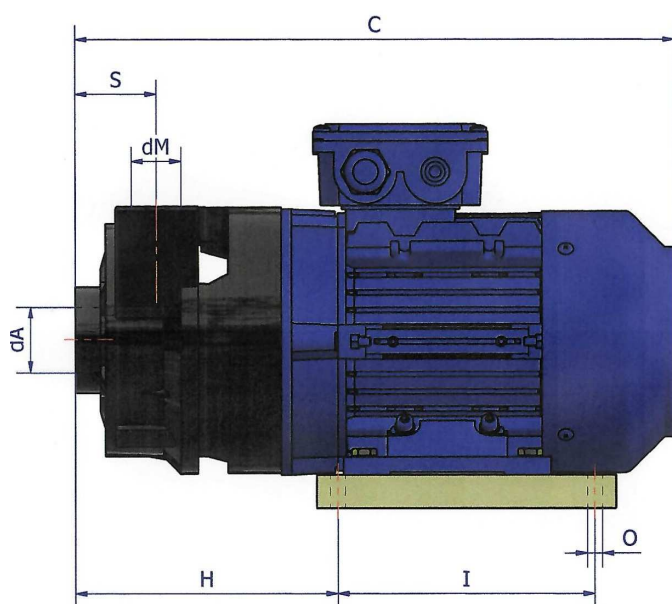

MODEL	dA	dM	B	C	D	E	F	G	H	I	N	O	S	Kg
O2A2-80	1 1/4"	1"	175	350	160	115	91	52	148	155	162	9	50	8,5
O2B1-100	1 1/4"	1"	175	350	160	115	91	52	148	155	162	9	50	8,5
O2B2-100	1 1/2"	1"	184	380	170	125	100	52	158	155	162	9	50	12
O2B3-120	1 1/4"	1"	184	380	170	125	100	52	158	155	162	9	50	12