





di Morelli D. & C. S.a.s.

Tel. 02/3541607—Fax 039/101787

www.ciemmepompe.com—info@ciemmepompe.com


POMPE CENTRIFUGHE

ELETTROPOMPE ad ASSE VERTICALE serie V3

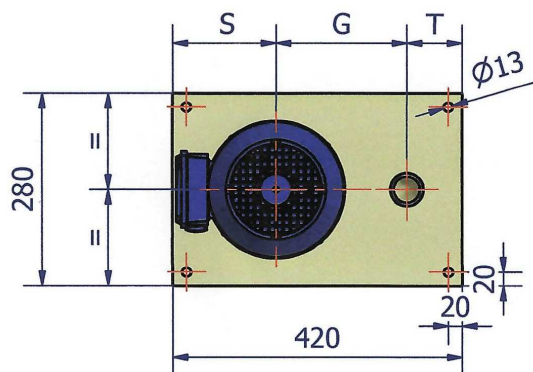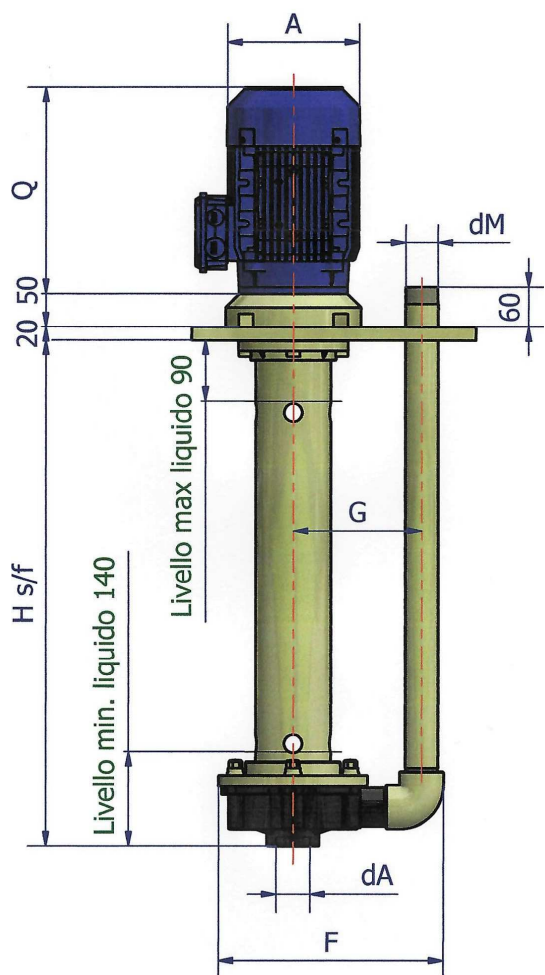

MODELLO	Kw	H prevalenza totale in mt						
		Q portata in l/min						
V3A1-130	1,5	H	0	4	10	14	18	20
		Q	380	320	240	160	70	0
V3A2-130	2,2	H	0	4	10	14	18	20
		Q	470	430	335	210	100	0
V3A3-130	4	H	0	4	10	14	18	20
		Q	600	510	410	320	200	0
V3B1-150	3	H	0	4	10	14	20	24
		Q	550	460	370	280	190	40
V3B2-150	4	H	0	40	10	14	20	24
		Q	650	550	450	340	210	80
V3B3-150	5,5	H	0	5	10	15	25	28
		Q	840	780	700	595	280	0

LE PORTATE SONO RIFERITE AL FUNZIONAMENTO CON ACQUA

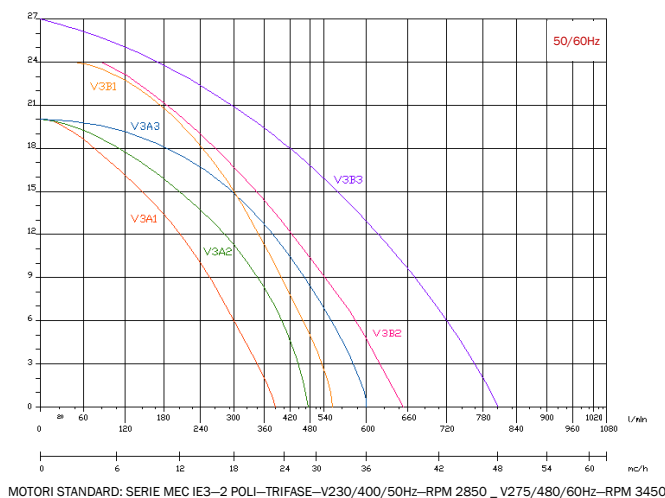

MODELLO	dA	dM	A	Q	E	F	G	S	T
V3A1-130	2"	1 1/4"	180	257	213	325	190	150	80
V3A2-130	2"	1 1/4"	180	282	213	325	190	150	80
V3A3-130	2"	1 1/2"	200	313	213	328	190	150	80
V3B1-150	2"	1 1/2"	200	313	213	328	190	150	80
V3B2-150	2"	1 1/2"	200	313	213	328	190	150	80
V3B3-150	2"	1 1/2"	200	313	213	328	190	150	80

LA LUNGHEZZA DELLA POMPA (H s/f) È VARIABILE A SECONDA DELLE ESIGENZE D'INSTALLAZIONE E VA DA UN MINIMO DI 250 A UN MASSIMO DI 2000 mm PASSANDO PER INTERVALLI DI 50 mm