




di Morelli D. & C. S.a.s.

Tel. 02/3541607—Fax 039/101787

www.ciemmepompe.com—info@ciemmepompe.com

POMPE CENTRIFUGHE



ELETTROPOMPE ad ASSE ORIZZONTALE serie O3

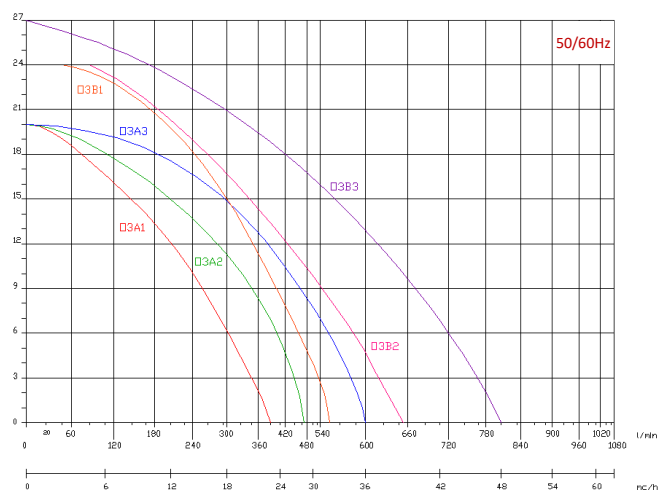

MOTORI STANDARD: SERIE MEC IE3-2 POLI-TRIFASE-V230/400/50 Hz-RPM 2850 _ V275/480/60Hz-RPM 3450

MODELLO	Kw	H prevalenza totale in mt						
		Q portata in l/min						
O3A1-130	1,5	H	0	4	10	14	18	20
		Q	380	320	240	160	70	0
O3A2-130	2,2	H	0	4	10	14	18	20
		Q	470	430	335	210	100	0
O3A3-130	4	H	0	4	10	14	18	20
		Q	600	510	410	320	200	0
O3B1-150	3	H	0	4	10	14	20	24
		Q	550	460	370	280	190	40
O3B2-150	4	H	0	4	10	14	20	24
		Q	650	550	450	340	210	80
O3B3-150	5,5	H	0	5	10	15	22	28
		Q	840	780	700	595	400	0

LE PORTATE SONO RIFERITE AL FUNZIONAMENTO CON ACQUA

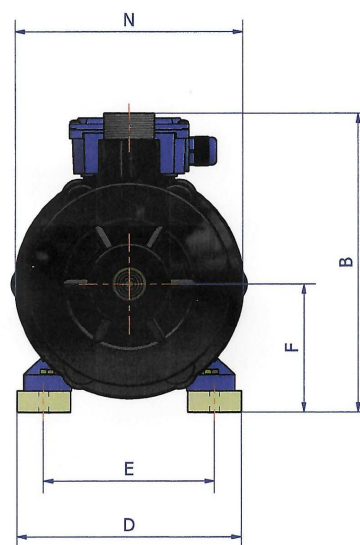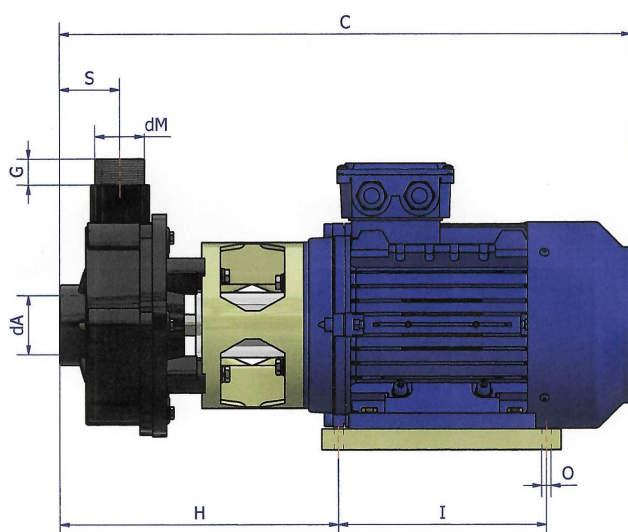

MODELLO	dA	dM	B	C	D	E	F	G	H	I	N	O	S	Kg
O3A1-130	2"	1 1/2"	270	511	190	140	110	25	241	200	213	9	58	20
O3A2-130	2"	1 1/2"	270	522	190	140	110	25	253	200	213	9	58	23
O3A3-130	2"	1 1/2"	280	550	210	160	120	25	268	200	213	9	58	30
O3B1-150	2"	1 1/2"	280	550	210	160	120	25	268	200	213	9	58	27
O3B2-150	2"	1 1/2"	280	550	210	160	120	25	268	200	213	9	58	30





di Morelli D. & C. S.a.s.

Tel. 02/3541607—Fax 039/101787

www.ciemmepompe.com—info@ciemmepompe.com

POMPE CENTRIFUGHE

ELETTROPOMPE ad ASSE ORIZZONTALE serie O3

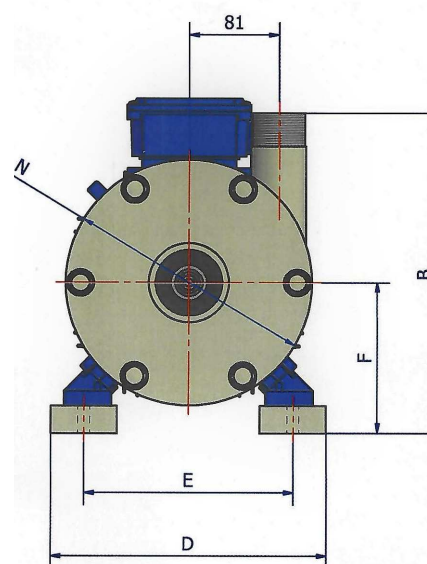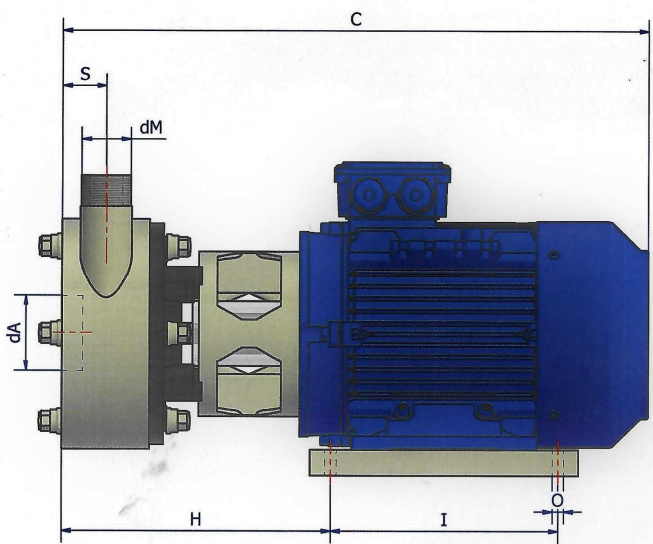

MODELLO	dA	dM	B	C	D	E	F	G	H	I	N	O	S	Kg
O3B3-150	2 1/2"	1 1/2"	290	567	250	190	137		260	220	223	11	42,5	34