




di Morelli D. & C. S.a.s.

Tel. 02/3541607—Fax 039/101787

www.ciemmepompe.com—info@ciemmepompe.com



POMPE CENTRIFUGHE

ELETTROPOMPE ad ASSE ORIZZONTALE serie O4

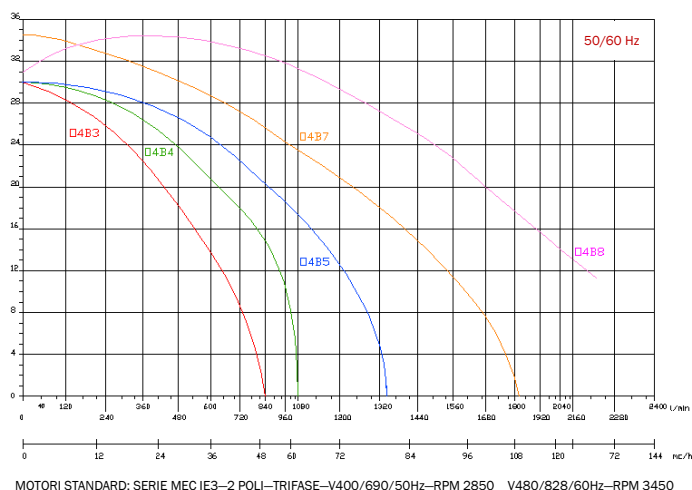

MODELLO	Kw	H prevalenza totale in mt					
		Q portata in l/min					
O4B3-160	5,5	H	0	10	15	20	25
		Q	840	700	550	400	270
O4B4-160	7,5	H	0	10	15	20	25
		Q	1080	1000	800	585	420
O4B5-160	9,2	H	0	10	15	20	25
		Q	1550	1270	1050	860	600
O4B7-160	11	H	0	10	18	25	32
		Q	1850	1600	1240	850	300
O4B8-160	15	H	13	24	29	34	35
		Q	2240	1500	1040	660	300

LE PORTATE SONO RIFERITE AL FUNZIONAMENTO CON ACQUA

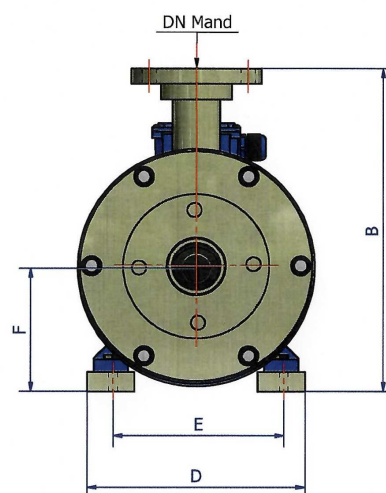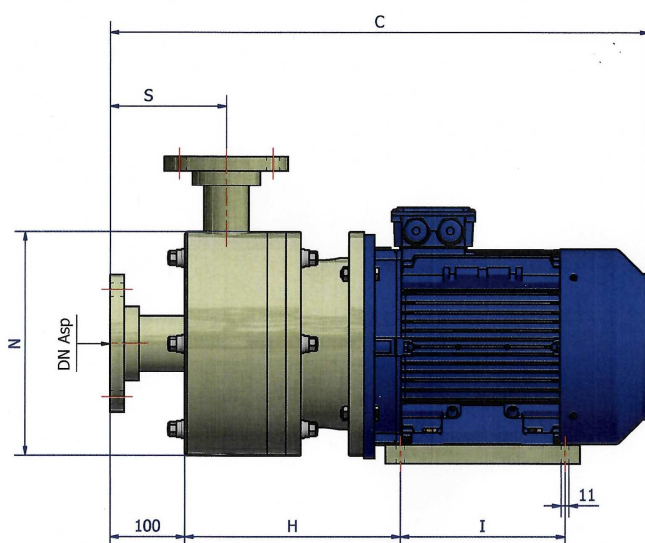

MODELLO	DN Asp	DN Mand	B	C	D	E	F	H	I	N	S	Kg
O4B3-160	65	50	417	719	276	216	157	288	220	300	155	62
O4B4-160	65	50	417	719	276	216	157	288	220	300	155	68
O4B5-160	80	65	417	757	276	216	157	288	258	300	155	75
O4B7-160	80	65	417	757	276	216	157	288	258	300	155	82
O4B8-160	100	80	417	815	276	216	157	288	258	300	155	85